
JOB NAME:

CONTRACTOR: DATE:

PAPER STRIP COLLATION FOR METAL CONNECTOR NAILS

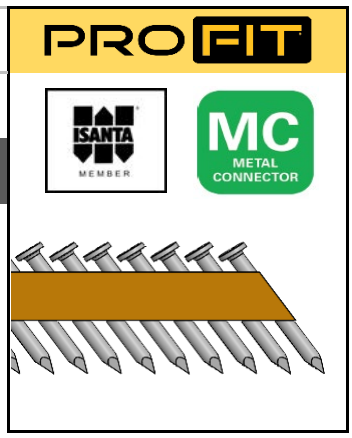


TYPES

Smooth



Head Markings



FUNCTION

For metal connectors, joist hangers, joist ties, hurricane straps, foundation anchors, and wall bracing
Fits most 31° metal connector nailers

FEATURES

Collated Fasteners meet or exceed the ASTM F1667 Standard (if applicable)
Head markings to allow easy identification of the nail specs after installation

CORROSION

Hot Dip Galvanized (HDG) in accordance with ASTM A153 Class D standards
300-series Stainless Steel is suitable for all marine applications
316 Stainless Steel is the recommended steel for salt water or chlorinated environments

CAUTION !

Proper personal protection equipment (PPE), i.e. safety glasses, must be worn during installation of any fastener
All materials and finish options shall be used in accordance with the recommendation of the treated lumber manufacturer

TECHNICAL	Length x Thk (inch)	Penny Length	Gauge (W&M)	Head Diameter	Head Marking	Nails per Strip	ASTM F1667 Bend Yield*
	1-1/2 x .131	Ø.131 in	10.25	Ø.281 in	1 or 8	24	100,000 psi
	1-1/2 x .148	Ø.148 in	9	Ø.281 in	3 or 10	24	100,000 psi
	2-1/2 x .148	Ø.148 in	9	Ø.281 in	4 or 10L	24	100,000 psi
	2-1/2 x .162	Ø.162 in	8	Ø.281 in	5 or 16	24	100,000 psi

* ASTM F1667 Bend Yield is a minimum average value appropriate for non-hardened products only

PRODUCT	Size	Box Count QTY	Brite sku	EG sku	HDG sku	305 SS sku	316 SS sku
Smooth	1-1/2 x .131	1000	-	-	606591	-	-
Smooth		4000	-	-	606590	-	-
Smooth	1-1/2 x .148	1000	-	-	606491	-	606090S
Smooth		3000	606390	-	606490	-	-
Smooth	2-1/2 x .162	2000	606380	-	606280	-	-
	Heat Treated						
Smooth	1-1/2 x .148	3000	606190	-	606290		
Smooth	2-1/2 x .148	2000	-	-	606480		

National Nail Corporation ● 2964 Clydon SW ● Grand Rapids, Michigan 49519 ● (800) 968-6245 ● www.nationalnail.com