




# STINGER® EXO25-SB

## SYNTHETIC UNDERLAYMENT

Product Specification		Test Method
Roll Width	48 in.	
Roll Length	250 ft.	
Weight Per Square	1.8 lbs	
Nominal Thickness	7 Mils	
Water Transmission	Pass	ASTM D-4869
Tensile Strength		ASTM D-5034
	MD	57 lbs
	CD	57 lbs
Tear Strength		
	MD	36 lbs
	CD	36 lbs
Pliability	Pass	ASTM D-226

**MEETS OR EXCEEDS  
REQUIREMENTS  
FOR ASTM D226 & D4869**

STINGER-branded; 48" x 48".

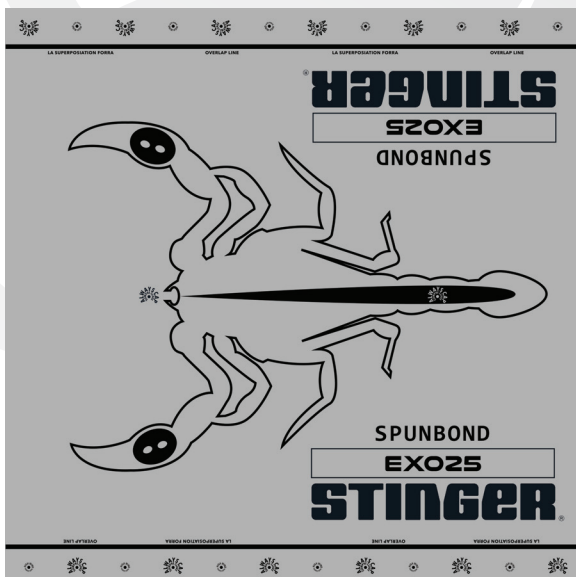

ITEM #0342971

Co-branding available with 34" x 17" logo.






# STINGER<sup>®</sup> EXO25-SB

## SYNTHETIC UNDERLAYMENT

- 25 year warranty.
- Made in the United States.
- Grey spunbond non-woven fabric walking surface
- Slip resistant back surface for added installation safety.
- 100% synthetic woven roof underlayment.
- Light - only 18lbs per roll.
- 10 squares per roll - fewer rolls to carry on the roof.
- UV resistant - can be left exposed for up to 6 months.
- Preprinted nailing pattern and overlap lines to speed installation.
- Approved and warrantied for use under metal roof coverings.
- Recommended installation with STINGER<sup>®</sup> cap tools and cap fasteners, available in collated StaplePac<sup>®</sup> and NailPac<sup>®</sup> or HandDrive cap nails.



### STINGER CAP SYSTEMS

RECOMMENDED **BEST PRACTICE** FOR SECURING SYNTHETIC UNDERLAYMENTS AND HOUSEWRAP.

**25 YEAR WARRANTY**

MK1039  
REV. 6/14/19

800.746.5659  
STINGERWORLD.COM